




## **6-Zone RGB+CCT Remote**

Model No.: FUT089S

## 1. Features

This product adopt world-wide used 2.4GHz frequency, GFSK control method, with the features of low power consumption, long distance transmitting, strong anti-interference and fast communication rate. can control specified Mi-Light / MiBoxer smart light with color, Adjustable light color, color temperature, saturation, brightness.

## 2. Products Key Diagram

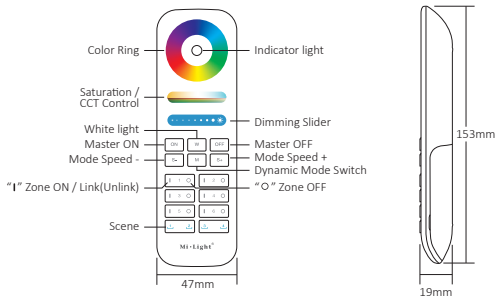

Touch the color ring to adjust light colors.



Under white light mode, adjust light color temperature;  
Under color light mode, adjust color saturation.



Slide the brightness slider to adjust light the brightness.



Short press switch to white light mode.



Short press: control all paired lights;  
Long press: dim top brightness for all lights.



Short press: turn off all paired lights;  
Long press: turn on "night light mode" for all lights.



Short press switch to Dynamic Mode.



Under dynamic mode: Speed up dynamic mode while pressing shortly;  
Under static mode: 10min delay off while doing long press (countdown started once the light flashes one time).



Under dynamic mode : slow down speed of dynamic mode once press shortly;  
Under static mode: 60s delay off while doing long press ( countdown started once the light flashes one time).



Short press: activate scene Long press 3 seconds: save color or dynamic mode  
( the light flashes one time slowly once completed successfully).

### 3. Linking Code / Unlinking Code Instructions

**Attention:** the light must be paired with remote control.

#### Linking Code Instructions



Linking failed if light is not blinking slowly, Please follow above steps again.

(Note: Light that have linked can't link again)

#### Unlinking Code Instructions




Unlinking failed if light is not blinking quickly, Please follow above steps again.

(Note: Light haven't linked that don't need to unlink)

## 4. Group control instruction

Pairing lights into different groups, dim and control light flexibly  
Group control solution: Press "I" firstly and dim, example as below.

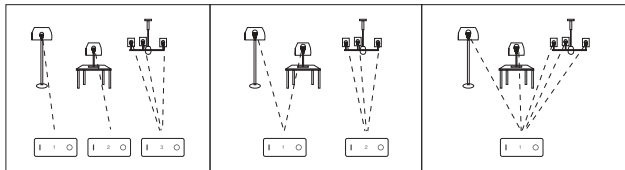

### Attention:

1. Countless lights can be added into each zone.
2. One light only can be paired with one sub zone from anyone remote.

## 5. Attention

1. This remote only support Mi-Light /Miboxer 2.4G product series, kindly review light instruction to check compatibility.
2. In the using of the remote, if the indicated lamp blinking quickly, Please change the battery in time. Please don't use poor quality battery to avoid the leaking of battery liquid to damage the remote.
3. The remote is accurate electronics, don't use it in humid or high temperature area, remove battery and keep it in dry or free static electricity environment.
4. Please don't use the remote on the wide-range metal or strong electromagnetic wave area, otherwise, it will badly affect the controlling distance.



Made in China