

CABAIL



OPRAWY LED




A

SAMSUNG
LED



B

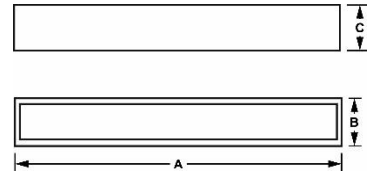

INDEX



Tc[K]



A [mm]

B [mm]

C [mm]



0 912340 9786012

	INDEX							A [mm]	B [mm]	C [mm]	
A	013548	Cabail LED	24 W	2391 lm	100 lm/W	4000 K	Czarny	600	65	79	5902808804000
	012196	Cabail LED	36 W	2811 lm	78 lm/W	3000 K		1180	70	80	5902216793460
B	012195	Cabail LED	36 W	2811 lm	78 lm/W	3000 K	Biały	1180	70	80	5902216793453
A	013015	Cabail LED	40 W	4400 lm	110 lm/W	4000 K	Czarny	1200	65	79	5902808801115
B	013330	Cabail LED	40 W	4400 lm	110 lm/W	4000 K	Biały	1200	65	79	5902808801122
A	013016	Cabail LED	50 W	5500 lm	110 lm/W	4000 K	Czarny	1500	64	78	5902808801092



AC 230V



SMD LED



80°



≥80



40000 h



20



0,9



21



Akcesoria w zestawie



Linki montażowe dł. 1m
Uchwyty montażowe

Materiał / Materiál / Material

PL: aluminium

Optymalne warunki eksploatacji:

Optimální provozní podmínky:

Optimálne prevádzkové podmienky:

Optimal operating conditions:

PL: temperatura.: od -25°C do +60°C

wilgotność: <85% ciśnienie: 690-1060 hPa

Uwagi:

PL: Zasilacz w komplecie

Brolux