

# SMART LED Downlight

2.4GHz RF remote controllable  
Smart phone APP long distance control  
(Mi-Light WiFi iBox is needed)




# RGB+CCT LED Downlight

2.4GHz RF remote controllable, WiFi enabled smart phone control.  
Dimmable & color temperature adjustable, color changing & saturation control.  
4 unique zones, individual light control, you can control different rooms individually.




## 6W Dual White LED Downlight

Model No.: FUT060  
Power: 6W  
Voltage: AC86-265V / 50-60Hz  
Kelvin: 2700-6500K  
Luminous Flux: 510-560LM  
Luminous Efficiency: 90LM/W  
CRI: >75  
Beam Angle: 120°  
PF: >0.6  
Control Distance: 30m  
Size: Φ102\*66mm  
Hole Size: 79-95mm  
Compatible Remote:

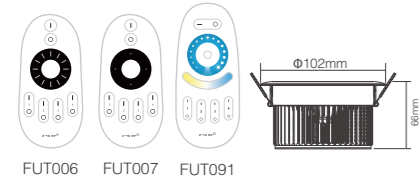

## 12W Dual White LED Downlight

Model No.: FUT061  
Power: 12W  
Voltage: AC86-265V / 50-60Hz  
Kelvin: 2700-6500K  
Luminous Flux: 1100LM  
Luminous Efficiency: 88LM/W  
CRI: >80  
Beam Angle: 120°  
PF: >0.65  
Control Distance: 30m  
Size: Φ144\*78mm  
Hole Size: 125-140mm  
Compatible Remote:

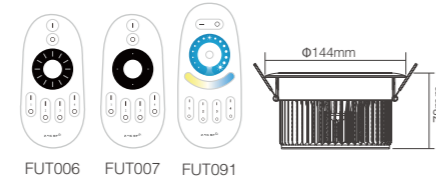


## 12W RGBW LED Downlight

Model No.: FUT067  
Power: 12W  
Voltage: AC86-265V / 50-60Hz  
Kelvin: WW(2700-3200K) / CW(6000-6500K)  
Luminous Flux: 1100LM  
Luminous Efficiency: 88LM/W  
CRI: >80  
Beam Angle: 120°  
PF: >0.65  
Control Distance: 30m  
Size: Φ144\*78mm  
Hole Size: 125-140mm  
Compatible Remote:



## 12W RGB+CCT LED Downlight

Model No.: FUT066  
Power: 12W  
Voltage: AC86-265V / 50-60Hz  
Kelvin: 2700-6500K  
Luminous Flux: 1100LM  
Luminous Efficiency: 88LM/W  
CRI: >80  
Beam Angle: 120°  
PF: >0.65  
Control Distance: 30m  
Size: Φ180\*40mm  
Hole Size: 145-150mm

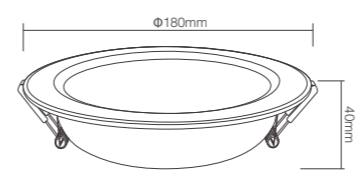

## 6W RGB+CCT LED Downlight

Model No.: FUT068  
Power: 6W  
Voltage: AC86-265V / 50-60Hz  
Kelvin: 2700-6500K  
Luminous Flux: 550-600LM  
Luminous Efficiency: 85LM/W  
CRI: >80  
Beam Angle: 120°  
PF: >0.6  
Control Distance: 30m  
Size: Φ118\*38mm  
Hole Size: 90-95mm

