

PANEL LED 50W SMD



MAXLED[®]
lighting technologies

A+

www.max-led.pl



Produkt posiada certyfikat jakości wydany przez TÜV Rheinland



ZASTOSOWANIE

- Oświetlenie hotelowe
- Oświetlenie biurowe
- Oświetlenie sal konferencyjnych
- Oświetlenie dekoracyjne sal balowych

Dane techniczne podstawowe

Temperatura barwowa	EAN	Strumień świetlny
4000K biały neutralny	5901812469847	5000 lm *

Dane techniczne wspólne

Rozmiar	60x60 cm
Moc znamionowa	50 W

Napięcie	220-240V
----------	----------

Kąt świecenia	120°
---------------	------

Klasa szczelności obudowy	IP30
---------------------------	------

Współczynnik oddawania barw	Ra ≥ 80
-----------------------------	---------

Współczynnik mocy	PF 0,98
-------------------	---------

Efekt braku migotania	TAK
-----------------------	-----

Możliwość ściemniania	NIE
-----------------------	-----

Trwałość	50 000 h
----------	----------

Liczba cykli włączeniowych	20 000
----------------------------	--------

Typ diod LED	SMD
--------------	-----

Materiał	aluminium
----------	-----------

Kolor obudowy	biały matowy
---------------	--------------


Zasilacz	LIFUD
----------	-------

Czas rozruchu	<0,2s
---------------	-------

Czas rozgrzewania do (60%), do (95%)	<2s
--------------------------------------	-----

* Całkowity strumień świetlny źródła światła za kloszem przy temp. otoczenia 25°C. Tolerancja strumienia świetlnego +/- 10%.


Rysunek techniczny




Wymiary produktu

X - wymiar	595 [mm]
D - wymiar	9 [mm]

Diagram rozkładu natężenia światła



Rysunek poglądowy sposób pakowania

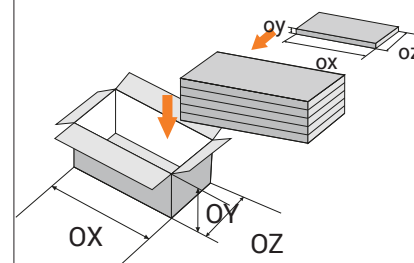

Opakowanie jednostkowe produktu

ox - wymiar	660 [mm]
oy - wymiar	32 [mm]
oz - wymiar	630 [mm]
Waga	2,7 [kg]

Opakowanie zbiorcze produktów

Typ pakowania O(XYZ)	1x5x1
Ilość sztuk	5
OX - wymiar	645 [mm]
OY - wymiar	178 [mm]
OZ - wymiar	675 [mm]
Waga	15,5 [kg]



WSZELKIE PRAWA ZASTRZEŻONE 2016 © GRUPA MAROX SP. Z O.O. SP. K.
GRUPA MAROX SPÓŁKA Z OGRANICZONĄ ODPOWIEDZIALNOŚCIĄ SPÓŁKA KOMANDYTOWA
POLAND, GOSPODARCZA 24, 32-600 OŚWIĘCIM

Zdjęcia produktów i niektóre parametry techniczne umieszczone w karcie produktu mogą nieznacznie odbiegać od produktów znajdujących się w sprzedaży. Zastrzegamy sobie prawo do błędów w druku.

MAX-LED PRODUCT CARD

LED PANEL 50W SMD



A+

www.max-led.pl



The product is certified
by TÜV Rheinland



APPLICATION

- hotel lighting
- office lighting
- domestic lighting
- utility rooms lighting

Basic technical data


Color temperature	EAN	Luminous flux
4000K neutral white	5901812469847	5000 lm *

Common technical data

Type	60x60 cm
Wattage	50 W
Voltage	220-240V
Beam angle	120°
IP protocol	IP30
Color Rendering Index	Ra ≥ 80
Power factor	PF 0,98
Effect Non-flicker	YES
Dimming	NO
Lifespan	50 000 h
Number of switching cycles	20 000
LED type	SMD
Material	aluminum
Housing color	matt white
Driver	LIFUD
Starting time	<0,2s
Warm-up time (60%), do (95%)	<2s

* The total luminous flux of the light source behind the shade at ambient temp. 25 °C.
Tolerance flux +/- 10%.


Technical drawing




Product dimensions

X - dimension	595 [mm]
D - dimension	9 [mm]

Diagram of light intensity distribution

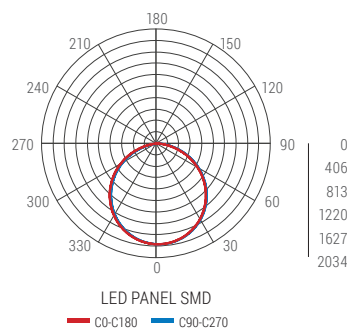

Illustrative method of packaging

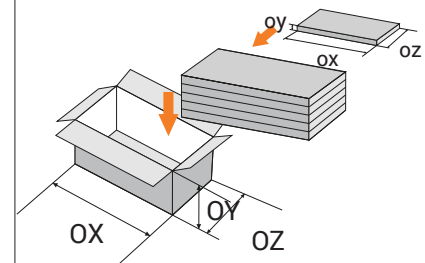

The unit package of the product

ox - dimension	660 [mm]
oy - dimension	32 [mm]
oz - dimension	630 [mm]
Weight	2,7 [kg]

The packaging of products

Packaging type O(XYZ)	1x5x1
Quantity	5
OX - dimension	645 [mm]
OY - dimension	178 [mm]
OZ - dimension	675 [mm]
Weight	15,5 [kg]



ALL RIGHTS RESERVED 2016 © GRUPA MAROX SP. Z O.O. SP. K.
GRUPA MAROX SPÓŁKA Z OGRANICZONĄ ODPOWIEDZIALNOŚCIĄ SPÓŁKA KOMANDYTOWA
POLAND, GOSPODARCZA 24, 32-600 OŚWIĘCIM

THE PICTURES OF PRODUCTS IN THE PRODUCT CARD MAY DIFFER FROM THE ACTUAL PRODUCTS. WE RESERVE THE RIGHT TO PRINTING MISTAKES AND ERRORS. THE SHAPE AND TECHNICAL DATE OF ALL PRODUCTS FROM THIS PRODUCT CARD ARE SUBJECT TO CHANGE WITHOUT PRIOR NOTICE.