



2.4GHz LED Spotlight




GU10 RGB+CCT LED Spotlight

- Dimmable & color temperature adjustable color changing & saturation control
- 2.4GHz RF remote controllable, control distance within 30 meters
- Smart phone APP control, long distance control (Mi-Light WiFi iBox is needed)



Model No.	Power	Voltage	Kelvin	Luminous Flux	Light Efficiency	CRI	PF	Beam angle
FUT103	4W	AC86-265V 50-60Hz	2700-6500K	250-280LM	70LM/W	>80	0.55	25°

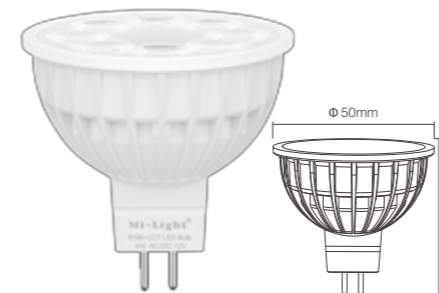

MR16 RGB+CCT LED Spotlight

- Dimmable & color temperature adjustable color changing & saturation control
- 2.4GHz RF remote controllable, control distance within 30 meters
- Smart phone APP control, long distance control (Mi-Light WiFi iBox is needed)



Model No.	Power	Voltage	Kelvin	Luminous Flux	Light Efficiency	CRI	Beam angle
FUT104	4W	AC/DC 12V	2700-6500K	250-280LM	70LM/W	>80	25°



MR16 RGBW LED Spotlight

- RGB+W Color changing, brightness & saturation control
- 2.4GHz RF remote controllable, control distance within 30 meters
- Smart phone APP control, long distance control (Mi-Light WiFi iBox is needed)



Model No.	Power	Voltage	Kelvin	Luminous Flux	Light Efficiency	CRI	Beam angle
FUT008	5W	AC/DC 12V	WW(2700-3200K) CW(6000-6500K)	440-490LM	85-90LM/W	>80	30°



GU10 Dual White LED Spotlight

Model No.: FUT011
 Power: 5W
 Voltage: AC86-265V / 50-60Hz
 Kelvin: 2700-6500K
 Luminous Flux: 440-490LM
 Luminous Efficiency: 85-90LM/W
 CRI: >80
 PF: 0.65
 Beam Angle: 30°
 Compatible Remote:



GU10 RGBW LED Spotlight

Model No.: FUT018
 Power: 5W
 Voltage: AC86-265V / 50-60Hz
 Kelvin: WW(2700-3200K) CW(6000-6500K)
 Luminous Flux: 440-490LM
 Luminous Efficiency: 85-90LM/W
 CRI: >80
 PF: 0.65
 Beam Angle: 30°
 Compatible Remote:

