




JDR




GU10


## SOREN

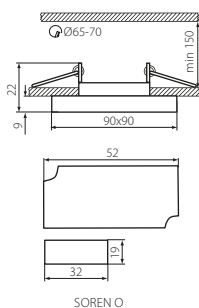

SOREN O-SR

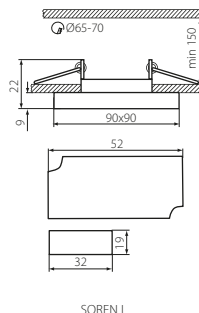

SOREN L-SR

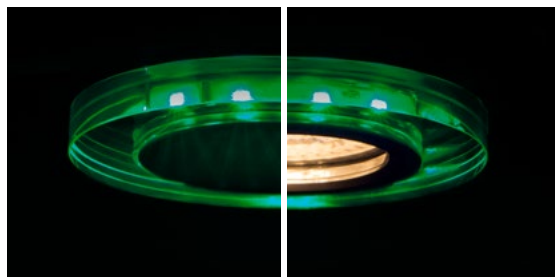

220-240V~  
50/60Hz



2x0,75mm<sup>2</sup>  
(mm<sup>2</sup>)  
13 cm

IP  
20



ERC

CE


**Kanlux**



\* Tc (K)  
EUPSE  
≤ 6x MacAdam




SOREN O-SR WW	24410	3000	250
SOREN O-BL	24411	BLUE	30
SOREN O-GN	24412	GREEN	100
SOREN O-SR CW	24416	6500	250
SOREN L-SR WW	24413	3000	210
SOREN L-BL	24414	BLUE	25
SOREN L-GN	24415	GREEN	90
SOREN L-SR CW	24417	6500	210



3,6W
20000h
≥15000

3,6W
20000h
≥15000

max 20W
JDR
GU10/GZ10



### PL

obudowa: szkło / pierścieni: stop metali nieżelaznych

\*oprawa dekoracyjna wyposażona w podświetlenie LED (niebieskie BL, zielone GN, ciepło-białe WW, zimno-białe CW)

### EN

casing: glass / ring: non-ferrous metal alloy

\*Decorative luminaire equipped with LED backlight (blue BL, green GN, warm white WW, cold white CW)

### RUS

корпус: стекло / кольцо: сплав цветных металлов

\*Декоративный светильник оснащен светодиодной подсветкой (синий BL, зеленый GN, тепло-белый WW, холодно-белый CW)